



US008737582B1

(12) **United States Patent**  
**Ho et al.**

(10) **Patent No.:** **US 8,737,582 B1**  
(45) **Date of Patent:** **\*May 27, 2014**

(54) **SYSTEM TO RECORD AND ANALYZE VOICE MESSAGE USAGE INFORMATION**

(56) **References Cited**

U.S. PATENT DOCUMENTS

(71) Applicant: **TP Lab, Inc.**, Palo Alto, CA (US)  
(72) Inventors: **Chi Fai Ho**, Palo Alto, CA (US); **Shin Cheung Simon Chiu**, Palo Alto, CA (US)  
(73) Assignee: **TP Lab, Inc.**, Palo Alto, CA (US)  
(\* ) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

5,481,597	A *	1/1996	Given	379/88.23
5,854,827	A *	12/1998	Maurer	379/88.02
5,889,840	A *	3/1999	Lang et al.	379/88.12
6,005,922	A *	12/1999	Longster et al.	379/88.18
6,333,973	B1 *	12/2001	Smith et al.	379/88.12
6,546,084	B1 *	4/2003	Castagna	379/88.12
6,704,394	B1 *	3/2004	Kambhatla et al.	379/67.1
6,792,082	B1 *	9/2004	Levine	379/67.1
6,950,502	B1 *	9/2005	Jenkins	379/88.12
6,999,566	B1 *	2/2006	Eason et al.	379/88.22
7,257,216	B2 *	8/2007	Schantz	379/229
7,457,398	B2 *	11/2008	Candell et al.	379/88.23
7,499,531	B2 *	3/2009	Claudatos et al.	379/88.25

This patent is subject to a terminal disclaimer.

\* cited by examiner

Primary Examiner — Olisa Anwah

(74) *Attorney, Agent, or Firm* — North Shore Patents, P.C.; Michele Liu Baillie

(21) Appl. No.: **13/943,321**

(22) Filed: **Jul. 16, 2013**

**Related U.S. Application Data**

(63) Continuation of application No. 13/095,884, filed on Apr. 28, 2011, now Pat. No. 8,515,032, and a continuation of application No. 11/250,763, filed on Oct. 13, 2005, now Pat. No. 7,961,854.

(51) **Int. Cl.**  
**H04M 1/64** (2006.01)

(52) **U.S. Cl.**  
USPC ..... **379/88.27**; 379/88.09


(58) **Field of Classification Search**  
USPC ..... 379/67.1, 68, 88.08, 88.09, 88.16, 379/88.22, 88.25, 88.27

See application file for complete search history.

(57) **ABSTRACT**

A voice message system records voice message usage information by creating voice message records when a voice message is sent and when it is received. The voice message record includes: the voice message, a voice message sender identity, a voice message recipient identity, and voice message action records. A voice message action records includes a voice message action that specifies an action on the voice message, and a voice message action time that includes the time at which the action occurs. Voice message actions include sent, received, and listened. The system further includes a voice message analyzer for analyzing voice message records, and a voice message reporter for generating reports from an analysis by the analyzer. The voice message system provides traceable information for voice messages, allowing companies to enforce a voice message usage policy.

**21 Claims, 8 Drawing Sheets**

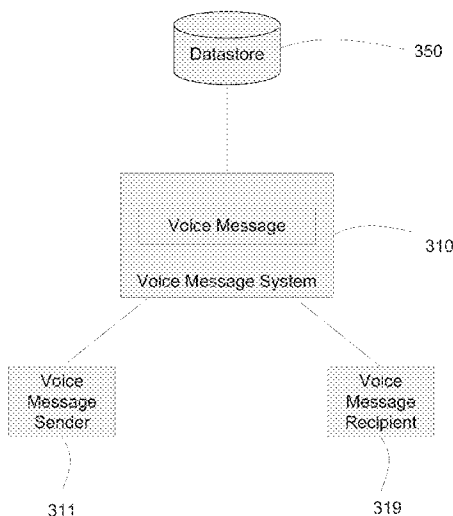

Voice Message System

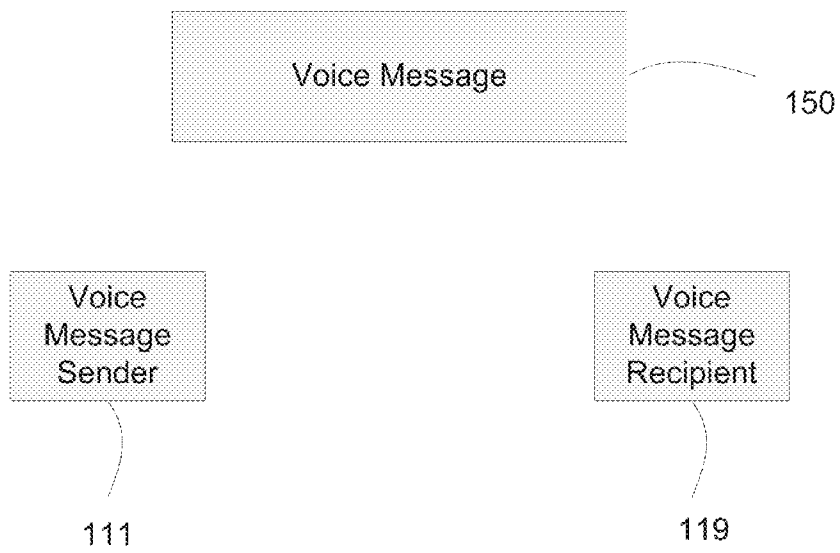


Figure 1. Voice Message, Voice Message Sender and Voice Message Recipient

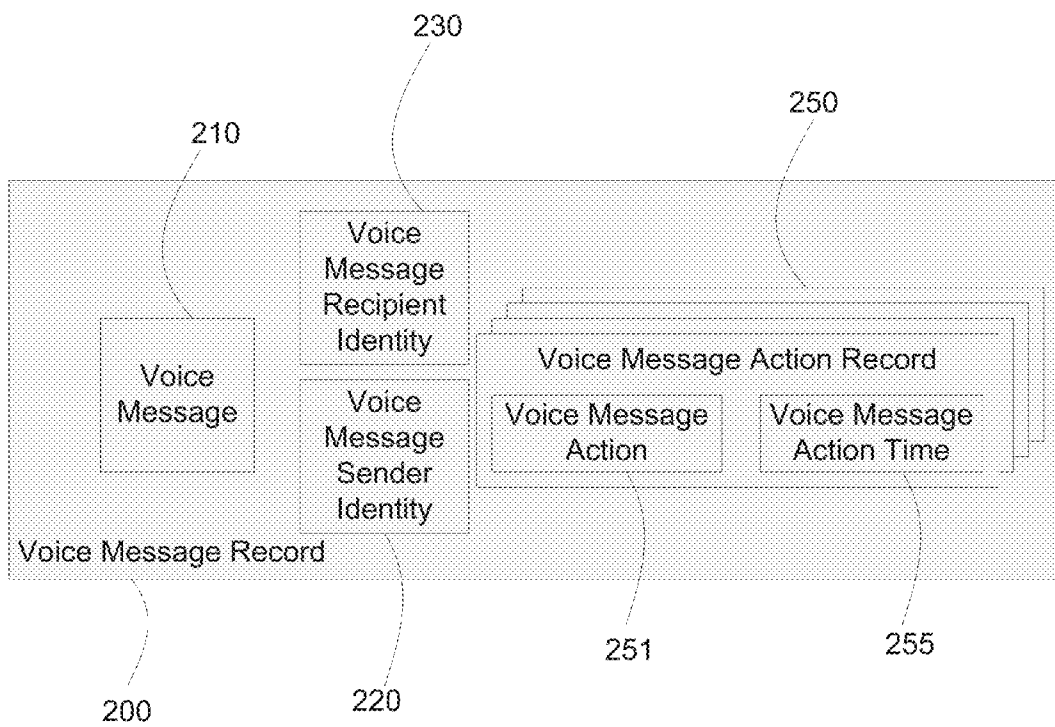


Figure 2. Voice Message Record

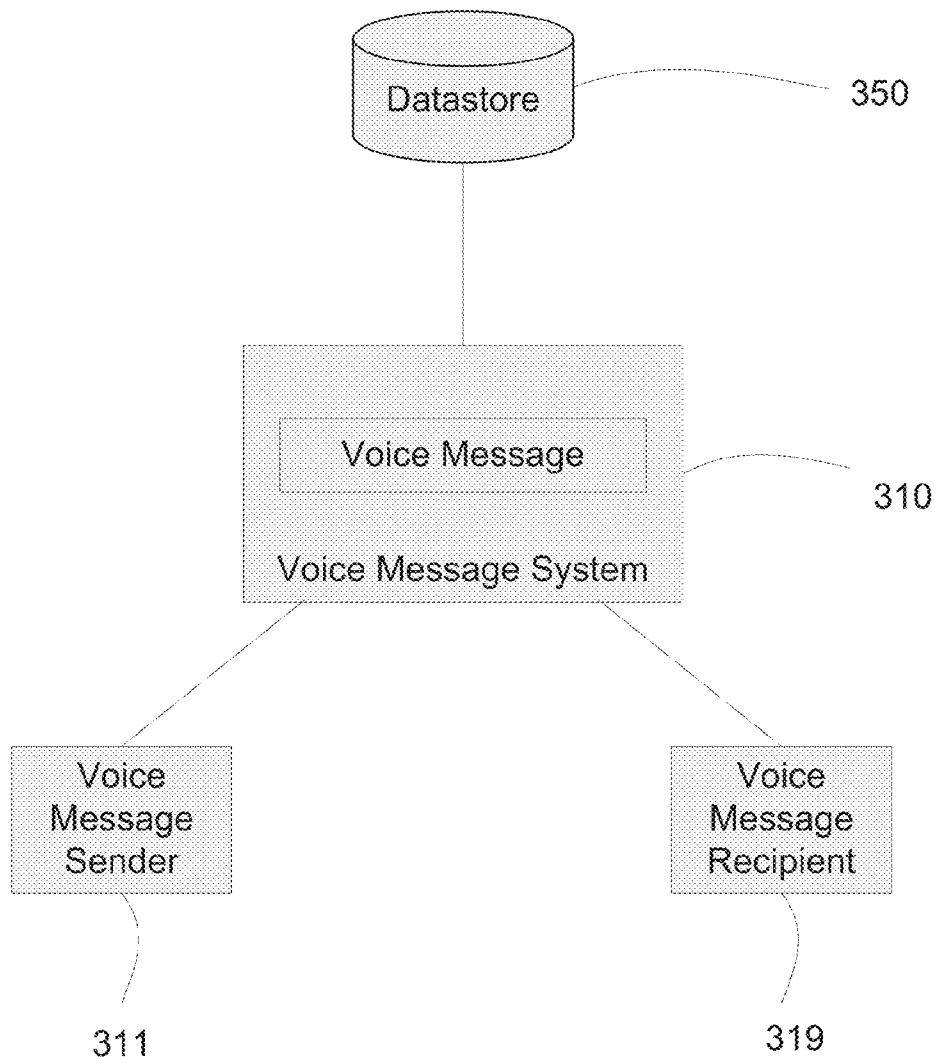


Figure 3. Voice Message System

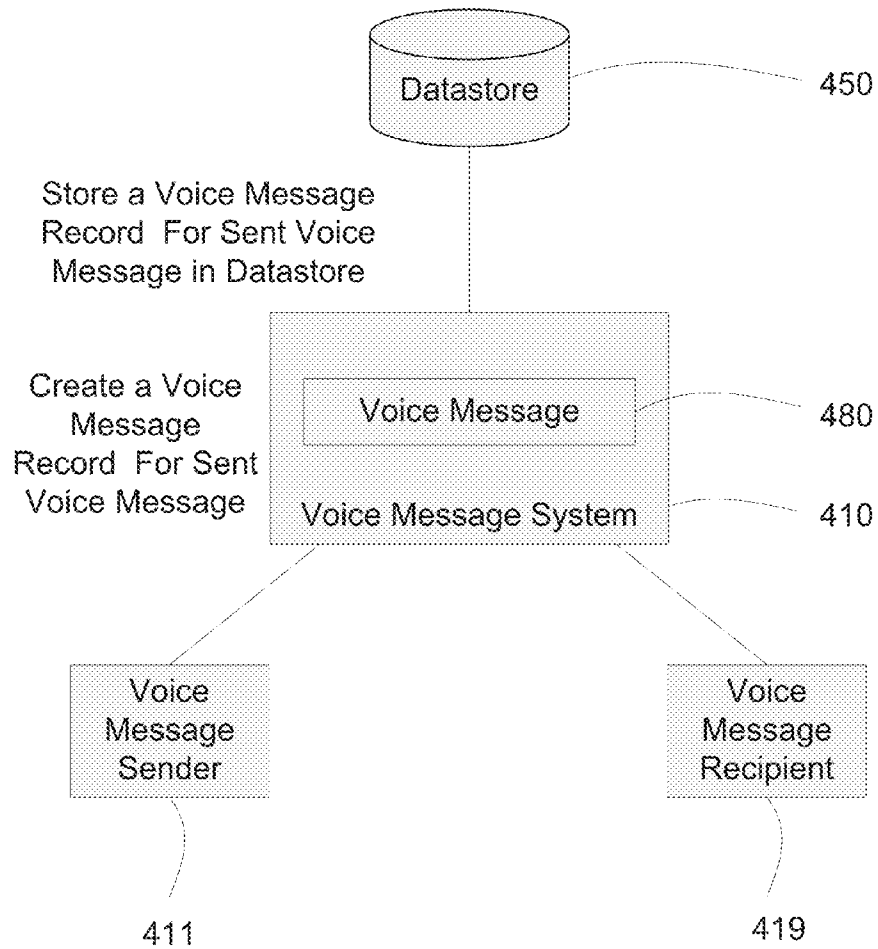


Figure 4. A Process to record sending information about a Voice Message

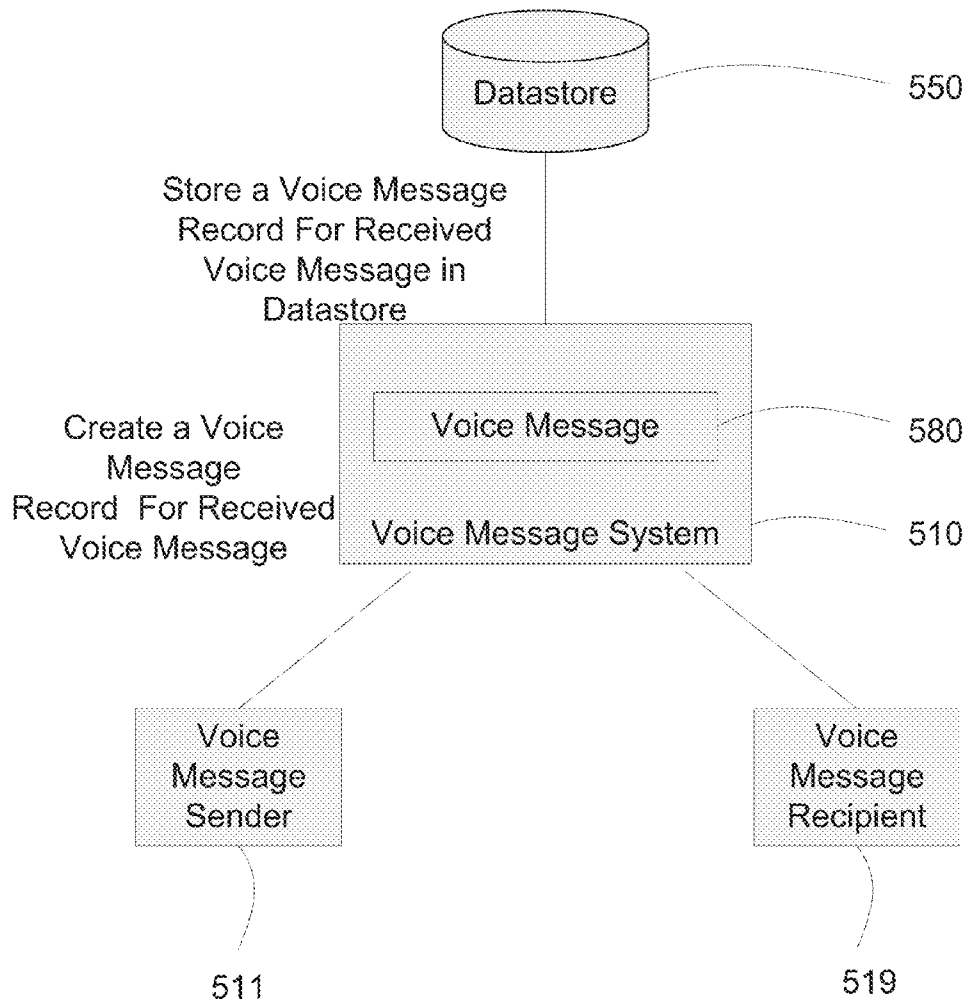


Figure 5. A Process to record receiving information about a Voice Message

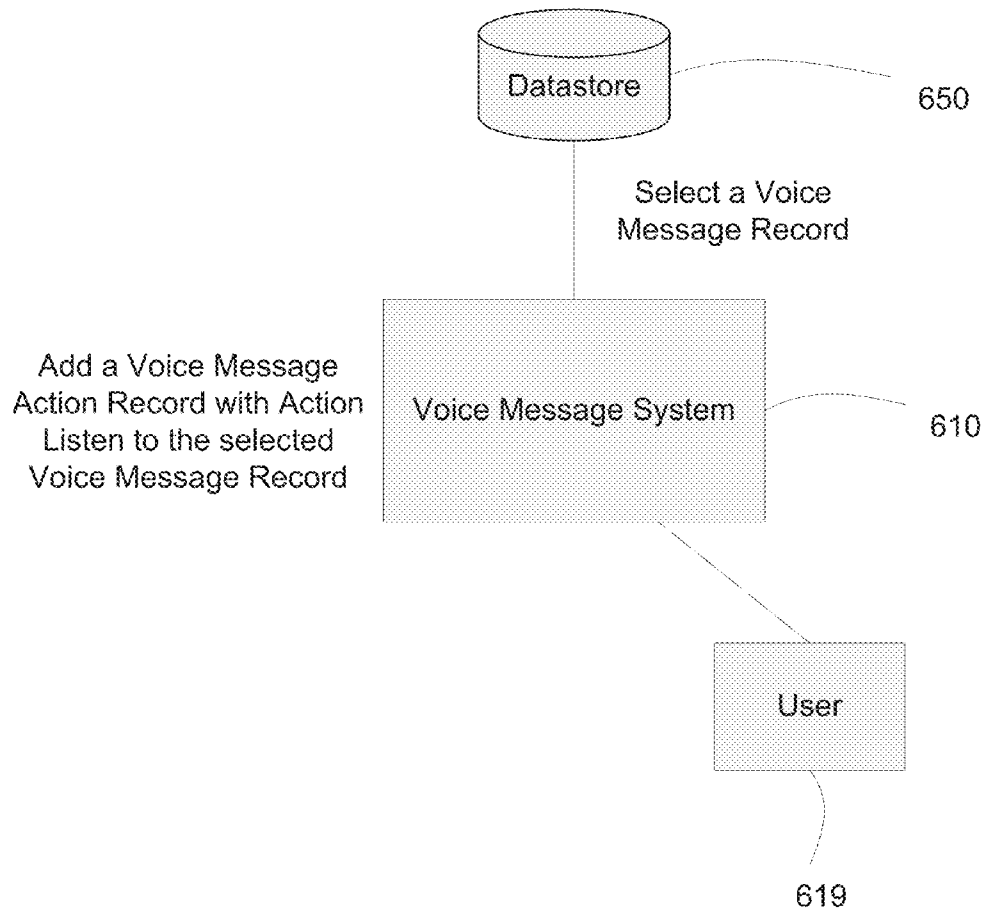


Figure 6. A Process to record listening information about to a Voice Message

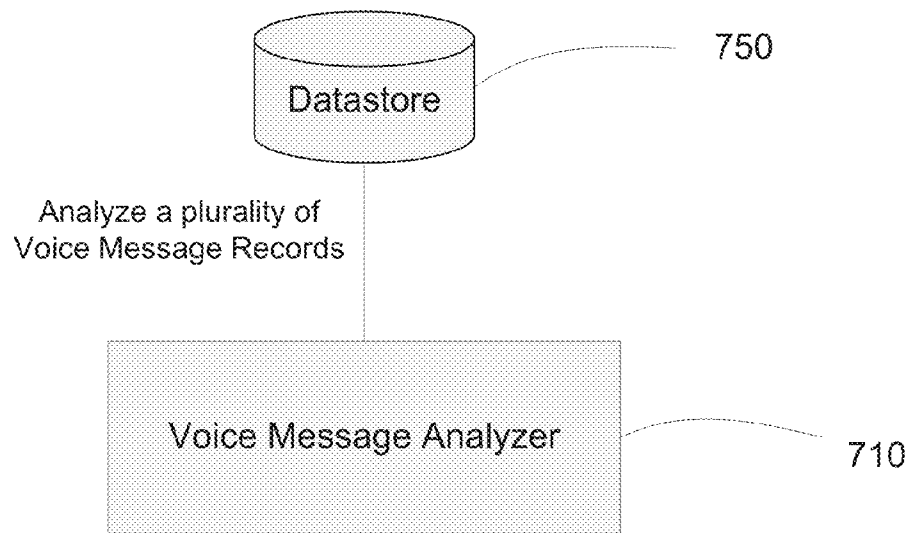


Figure 7. A Process of analyzing a plurality of Voice Messages



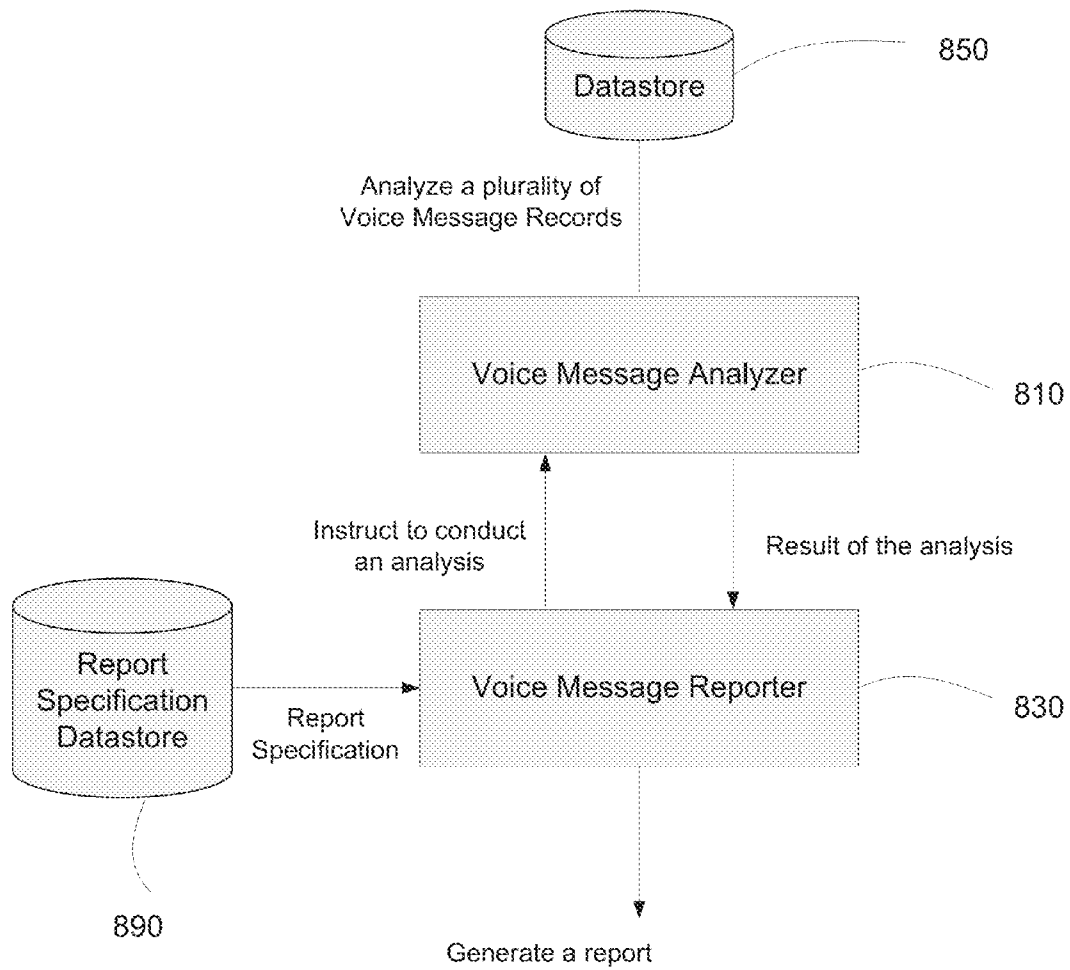


Figure 8. A Process of reporting on a plurality of Voice Messages

1

## SYSTEM TO RECORD AND ANALYZE VOICE MESSAGE USAGE INFORMATION

### CROSS-REFERENCE TO RELATED APPLICATIONS

The present application is a continuation of co-pending U.S. patent application Ser. No. 13/095,884, filed on Apr. 28, 2011; which in turn is a continuation of U.S. patent application Ser. No. 11/250,763, filed on Oct. 13, 2005, issued as U.S. Pat. No. 7,961,854 on Jun. 14, 2011.

### BACKGROUND OF THE INVENTION

#### 1. Field

This invention relates generally to telecommunications, and more specifically, to a system to record and analyze voice message usage information.

#### 2. Related Art

Voice mail systems, also known as voice message systems, gained popularity in the corporate world since its introduction in late 1970s. A user can leave a voice message at a voice mail system for another user without the assistance of an attendant or a secretary. Likewise, a user can listen to his or her voice messages from a voice mail system without the assistance of an attendant or a secretary.

Voice mail systems have since become an essential communications tool for businesses, government agencies, education institutions and communities. While providing convenience for the users to conduct business and for personal use, the usage of voice messages for communications creates a set of privacy problems.

In one example, John works for Central Realtors as a real estate broker. John uses the company's voice message system for both business and personal purposes. The company publishes a voice message usage policy, which respects the privacy of its employees. However, there is no tractable information to allow the company to distinguish between a business voice message and a personal voice message in order to apply usage measures as stated.

In another example, the management of Corner Technologies suspects that an employee has been leaking proprietary information to a competitor, and would like to collect evidence, including the employee's voice messages between Aug. 10 and Aug. 22, 2003. However, the employee has already deleted these voice messages, and there is no consistent backup procedure to ensure the availability of deleted voice messages.

Accordingly, there exists a need for a method and system for recording and analyzing voice message usage information. The present invention addresses such a need.

### BRIEF SUMMARY OF THE INVENTION

A voice message system records voice message usage information by creating voice message records when a voice message is sent and when it is received. The voice message record includes: the voice message, a voice message sender identity, a voice message recipient identity, and voice message action records. A voice message action records includes a voice message action that specifies an action on the voice message, and a voice message action time that includes the time at which the action occurs. Voice message actions include sent, received, and listened. The system further includes a voice message analyzer for analyzing voice message records, and a voice message reporter for generating reports from an analysis by the analyzer. The voice message

2

system provides tractable information for voice messages, allowing companies to enforce a voice message usage policy.

### BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE FIGURES

FIG. 1 illustrates a Voice Message, a Voice Message Sender, and a Voice Message Recipient.

FIG. 2 illustrates a Voice Message Record.

FIG. 3 illustrates a Voice Message System.

FIG. 4 illustrates a process to record sending information about a Voice Message.

FIG. 5 illustrates a process to record receiving information about a Voice Message.

FIG. 6 illustrates a process to record listening information about Voice Message.

FIG. 7 illustrates a process of analyzing a plurality of Voice Message Records.

FIG. 8 illustrates a process of reporting on a plurality of Voice Message Records.

### DETAILED DESCRIPTION OF THE INVENTION

FIG. 1 illustrates a Voice Message **150**, a Voice Message Sender **111** and a Voice Message Recipient **119**. Voice Message **150** includes a recorded spoken message from Voice Message Sender **111** to Voice Message Recipient **119**.

FIG. 2 illustrates a Voice Message Record. A Voice Message Record includes usage information about a Voice Message.

A Voice Message Record **200** includes a Voice Message **210**, a Voice Message Sender Identity **220**, a Voice Message Recipient Identity **230**, and a plurality of Voice Message Action Records **250**.

Voice Message Sender Identity **220** identifies the Voice Message Sender **111** who sends a Voice Message **210**. Voice Message Recipient Identity **230** identifies the Voice Message Recipient **119** who receives the Voice Message **210**.

A Voice Message Action Record **250** records one or more actions on Voice Message **210**.

A Voice Message Action Record **250** includes a Voice Message Action **251** that specifies the action, and a Voice Message Action Time **255** that includes the time at which the action indicated in Voice Message Action **251** occurs. In one embodiment, Voice Message Action Time **255** includes the time of day at which the action occurs. In another embodiment, Voice Message Action Time **255** includes the time period during which the action occurs.

FIG. 3 illustrates a Voice Message System.

Voice Message System **310** connects to a Datastore **350**. Datastore **350** stores a plurality of Voice Message Records. A Voice Message Sender **311** connects to Voice Message System **310** to send a Voice Message. A Voice Message Recipient **319** connects to a Voice Message System **310** to listen to a Voice Message.

Voice Message System **310** includes a plurality of processes. One embodiment includes processes to record sending information, receiving information, or listening information about a Voice Message. One embodiment includes processes of analyzing or reporting on the plurality of Voice Message Records. The processes are discussed in subsequent illustrations.

FIG. 4 illustrates a process to record sending information about a Voice Message.

A Voice Message Sender **411** connects to a Voice Message System **410** and sends a Voice Message **480**. The recipient of Voice Message **480** is Voice Message Recipient **419**. Voice

Message System **410** receives Voice Message **480**. Voice Message System **410** creates a Voice Message Record.

Voice Message System **410** includes Voice Message **480** in the Voice Message Record for the sent Voice Message.

Voice Message System **410** includes a Voice Message Sender Identity of Voice Message Sender **411** in the Voice Message Record.

In one embodiment, Voice Message Sender **411** connects to Voice Message System **410** in a telephone call via a telephone system. In one embodiment, the telephone system provides to Voice Message System **410** a telephone extension number of the telephone used in the connection. Voice Message System **410** includes the telephone extension number in the Voice Message Sender Identity. In one embodiment, Voice Message System **410** obtains a user name based on the telephone extension number. Voice Message System **410** includes the user name in the Voice Message Sender Identity. In another embodiment, the telephone system provides Voice Message System **410** the calling party telephone number of the telephone call. Voice Message System **410** includes the calling party telephone number in the Voice Message Sender Identity. In one embodiment, the telephone system provides Voice Message System **410** the caller identity of the telephone call. Voice Message System **410** includes the caller identity in the Voice Message Sender Identity. In one other embodiment, Voice Message System **410** prompts Voice Message Sender **411** for information about Voice Message Sender **411**. Voice Message Sender **411** provides Voice Message System **410** the information. Voice Message System **410** includes the information in the Voice Message Sender Identity. In one embodiment, the information includes a user identity for the Voice Message Sender **411**.

In another embodiment, Voice Message Sender **411** connects to Voice Message System **410** via an electronic message system. Voice Message Sender **411** sends Voice Message **480** in an electronic message. In one embodiment, the electronic message system provides Voice Message System **410** a sender identity of the electronic message.

Voice Message System **410** includes the sender identity in the Voice Message Sender Identity.

Voice Message System **410** includes a Voice Message Recipient Identity of Voice Message Recipient **419** in the Voice Message Record.

In one embodiment, Voice Message Sender **411** connects to Voice Message System **410** in a telephone call via a telephone system. In one embodiment, the telephone system provides Voice Message System **410** the digits Voice Message Sender **411** dials when setting up the telephone call. Voice Message System **410** includes the dialed digits in the Voice Message Recipient Identity. In another embodiment, Voice Message System **410** prompts Voice Message Sender **411** for information about Voice Message Recipient **419**. Voice Message Sender **411** provides Voice Message System **410** the information. Voice Message System **410** includes the information in the Voice Message Recipient Identity. In one embodiment, the information includes a user identity for the Voice Message Recipient **419**.

In another embodiment, Voice Message Sender **411** connects to Voice Message System **410** via an electronic message system. Voice Message Sender **411** sends Voice Message **480** in an electronic message. In one embodiment, the electronic message system provides Voice Message System **410** a recipient identity of the electronic message.

Voice Message System **410** includes the recipient identity in the Voice Message Recipient Identity.

Voice Message System **410** further includes in the Voice Message Record a Voice Message Action Record with Voice

Message Action set to Action Send. In one embodiment, Voice Message System **410** includes the current time of day in the Voice Message Action Time of the Voice Message Action Record. In another embodiment, the electronic message system provides Voice Message System **410** a sending time. The sending time is the time of day when Voice Message Sender **411** sends the electronic message that includes Voice Message **480**. Voice Message System **410** includes the sending time in the Voice Message Action Time of the Voice Message Action Record.

In one embodiment, the Voice Message Sender Identity in a Voice Message Record indicates the location of the Voice Message Sender **411** identified by the Voice Message Sender Identity at the time when the Voice Message Sender **411** sends the Voice Message **480** that is included in the Voice Message Record. In one embodiment, the Voice Message Sender Identity includes a telephone extension number. In one embodiment, the telephone extension number indicates the location based on a telephone wiring plan of a Private Branch Exchange (PBX) that connects to the telephone extension. In one embodiment, the location is a cubicle. In another embodiment, the location is a conference room. In one other embodiment, the location is the front lobby of a building. In another embodiment, the Voice Message Sender Identity includes a calling party telephone number. In one embodiment, the calling party indicates the location based on information about the telephone service associated with the telephone number. In one embodiment, the telephone service is a residential telephone service; the location is a street address of the service subscription. In another embodiment, the telephone service is a mobile telephone service; the location is a street address of a wireless base station that serves the telephone call the Voice Message Sender **411** uses to send the Voice Message **480**.

In one embodiment, Voice Message System **410** stores the Voice Message Record in Datastore **450**. In one embodiment, Datastore **450** is a flash memory. In another embodiment, Datastore **450** is a hard disk. In yet another embodiment, Datastore **450** is a memory. In one other embodiment, Datastore **450** is a database. In one embodiment, Voice Message System **410** includes the Datastore **450**.

FIG. 5 illustrates a process to record receiving information about a Voice Message.

When Voice Message System **510** receives a Voice Message **580** from a Voice Message Sender **511** for a Voice Message Recipient **519**, Voice Message System **510** creates a Voice Message Record.

Voice Message System **510** includes Voice Message **580** in the Voice Message Record.

Voice Message System **510** includes a Voice Message Sender Identity of Voice Message Sender **511** in the Voice Message Record.

In one embodiment, Voice Message Sender **511** connects to Voice Message System **510** in a telephone call via a telephone system. In one embodiment, the telephone system provides Voice Message System **510** a telephone extension number of the telephone used in the connection. Voice Message System **510** includes the telephone extension number in the Voice Message Sender Identity. In one embodiment, Voice Message System **510** obtains a user name based on the telephone extension number. Voice Message System **510** includes the user name in the Voice Message Sender Identity. In another embodiment, the telephone system provides Voice Message System **510** the calling party telephone number of the telephone call. Voice Message System **510** includes the calling party telephone number in the Voice Message Sender Identity. In one embodiment, the telephone system provides Voice

Message System **510** the caller identity of the telephone call. Voice Message System **510** includes the caller identity in the Voice Message Sender Identity. In one other embodiment, Voice Message System **510** prompts Voice Message Sender **11** for information about Voice Message Sender **511**. Voice Message Sender **511** provides Voice Message System **510** the information. Voice Message System **510** includes the information in the Voice Message Sender Identity. In one embodiment, the information includes a user identity for the Voice Message Sender **511**.

In another embodiment, Voice Message Sender **511** connects to Voice Message System **510** via an electronic message system. Voice Message Sender **511** sends Voice Message **580** in an electronic message. In one embodiment, the electronic message system provides Voice Message System **510** a sender identity of the electronic message.

Voice Message System **510** includes the sender identity in the Voice Message Sender Identity.

Voice Message System **510** includes a Voice Message Recipient Identity of Voice Message Recipient **519** in the Voice Message Record.

In one embodiment, Voice Message Sender **511** connects to Voice Message System **510** in a telephone call via a telephone system. In one embodiment, the telephone system provides Voice Message System **510** the digits the phone system receives for setting up the telephone call. Voice Message System **510** includes the received digits in the Voice Message Recipient Identity. In one embodiment, Voice Message System **510** maps the received digits to a telephone extension number. Voice Message System **510** includes the telephone extension number in the Voice Message Recipient Identity. In one embodiment, Voice Message System **510** obtains a user name based on the telephone extension number. Voice Message System **510** includes the user name in the Voice Message Recipient Identity. In another embodiment, Voice Message System **510** obtains a user name based on the received digits. Voice Message System **510** includes the user name in the Voice Message Recipient Identity. In one other embodiment, Voice Message System **510** prompts Voice Message Sender **511** for information about Voice Message Recipient **519**. Voice Message Sender **511** provides Voice Message System **510** the information. Voice Message System **510** includes the information in the Voice Message Recipient Identity. In one embodiment, the information includes a user identity for the Voice Message Recipient **519**.

In another embodiment, Voice Message Sender **511** connects to Voice Message System **510** via an electronic message system. Voice Message Sender **511** sends Voice Message **580** in an electronic message. In one embodiment, the electronic message system provides Voice Message System **510** a recipient identity of the electronic message. Voice Message System **510** includes the recipient identity in the Voice Message Recipient Identity.

Voice Message System **510** further includes a Voice Message Action Record in the Voice Message Record with Voice Message Action set to Action Receive. In one embodiment, Voice Message System **510** includes the current time of day in the Voice Message Action Time of the Voice Message Action Record. In one embodiment, Voice Message **580** is sent to more than one Voice Message Recipient. A Voice Message Action Record would then be created for the Voice Message received by each Voice Message Recipient.

In one embodiment, Voice Message System **510** stores the Voice Message Record in Datastore **550**. In one embodiment, Datastore **550** is a flash memory. In another embodiment, Datastore **550** is a hard disk. In yet another embodiment, Datastore **550** is a memory. In one other embodiment, Data-

store **550** is a database. In one embodiment, Voice Message System **510** includes the Datastore **550**.

FIG. 6 illustrates a process to record listening information about Voice Message.

In one embodiment, a User **619** connects to Voice Message System **610**. User **619** submits to Voice Message System **610** an identity. In one embodiment, Voice Message System **610** selects from Datastore **650** a Voice Message Record with Voice Message Recipient Identity matching the submitted identity, and that includes a Voice Message Action Record with Voice Message Action of Action Receive.

Voice Message System **610** updates the selected Voice Message Record with a Voice Message Action Record. The Voice Message Action Record has Voice Message Action set to Action Listen. In one embodiment, Voice Message System **610** updates the selected Voice Message Record after the Voice Message Record is selected. In one embodiment, Voice Message System **610** updates the selected Voice Message Record after User **619** listens to the Voice Message included in the selected Voice Message Record. In one embodiment, Voice Message System **610** includes in the Voice Message Action Time of the Voice Message Action Record the time of day when User **619** listens to the Voice Message. In one embodiment, Voice Message System **610** includes in the Voice Message Action Time of the Voice Message Action Record the time period during when User **619** listens to the Voice Message. In one embodiment, User **619** deletes the Voice Message after listening to the Voice Message. Voice Message System **610** includes a Voice Message Action Record in the Voice Message Record with Voice Message Action set to Action Delete. In one embodiment, User **619** forwards the Voice Message to another Voice Message Recipient. Voice Message System **610** includes a Voice Message Action Record in the Voice Message Record with Voice Message Action set to Action Forward. In one embodiment, Voice Message System **610** additionally creates a new Voice Message Record for the forwarded Voice Message with Voice Message Action Record set to Action Sent.

In one embodiment, when a User **619** wants to listen to a voice message, Voice Message System **610** selects a voice message that has not been listened to. In this embodiment, Voice Message System **610** selects from Datastore **650** a Voice Message Record that includes a Voice Message Recipient Identity matching the identity submitted by the User **619**, and that includes a Voice Message Action Record with Voice Message Action of Action Receive, and that does not include a Voice Message Action Record with Voice Message Action of Action Listen.

In another embodiment, when a User **619** wants to listen to a voice message, Voice Message System **650** selects a voice message even if the voice message has been listened to. Voice Message System **610** selects from Datastore **650** a Voice Message Record that includes a Voice Message Recipient Identity matching the identity submitted by the User **619**, and that includes a Voice Message Action Record with Voice Message Action of Action Receive. Each time the User **619** listens to the Voice Message included in the selected Voice Message Record, Voice Message System **610** adds a Voice Message Action Record to the selected Voice Message Record.

In one embodiment, Voice Message Action Record includes a User Action Attribute. In one embodiment, User Action Attribute includes information about the connection over which a User **619** listens to a voice message. In one embodiment, the information about the connection indicates the location where the User **619** listens to the voice message. In one embodiment, a User **619** connects to Voice Message

System **610** in a telephone call via a telephone system to listen to a voice message. In one embodiment, the telephone system provides Voice Message System **610** a telephone extension number of the telephone used in the connection. Voice Message System **610** includes the telephone extension number in the User Action Attribute. In another embodiment, the telephone system provides Voice Message System **610** a calling party telephone number of the telephone call. Voice Message System **610** includes the calling party telephone number in the User Action Attribute. In yet another embodiment, the telephone system provides Voice Message System **610** a caller identity of the telephone call. Voice Message System **610** includes the caller identity in the User Action Attribute.

In one embodiment, User Action Attribute includes the identity of a first User who listens to a voice message for a second User. In one embodiment, a first User connects to Voice Message System **610** to listen to a voice message. The first User submits to Voice Message System **610** an identity of the first User and an identity of a second User. Voice Message System **610** selects a Voice Message Record with Voice Message Recipient Identity matching the identity of the second User. Voice Message System **610** updates the selected Voice Message Record with a Voice Message Action Record. Voice Message System **610** includes the identity of the first User in the User Action Attribute. In this embodiment, a manager can delegate to her secretary to listen to her voice messages with proper recording of usage information.

In one embodiment, Voice Message System **610** stores the updated Voice Message Record in Datastore **650**. In one embodiment, Datastore **650** is a flash memory. In another embodiment, Datastore **650** is a hard disk. In yet another embodiment, Datastore **650** is a memory. In one other embodiment, Datastore **650** is a database. In one embodiment, Voice Message System **610** includes the Datastore **650**.

FIG. 7 illustrates a process of analyzing a plurality of Voice Message Records.

Voice Message System includes a Voice Message Analyzer **710**. Voice Message Analyzer **710** connects to Datastore **750**. Voice Message Analyzer **710** analyses a plurality of Voice Message Records regarding usage information. In one embodiment, the analysis answers a query. In one embodiment, the result of the analysis is for generating a report.

In one embodiment, Voice Message Analyzer **710** answers the query “Who has received a voice message from John Smith?” Voice Message Analyzer **710** selects from Datastore **750** all Voice Message Record with Voice Message Sender Identity that matches the name “John Smith”, and that includes a Voice Message Action Record with Voice Message Action of Action Receive. Voice Message Analyzer **710** extracts from the selected zero or more Voice Message Record the Voice Message Recipient Identity as the result of the analysis. In one embodiment, John Smith uses a plurality of telephones to send voice messages, Voice Message Analyzer **710** matches the Voice Message Sender Identity against a plurality of telephone numbers John Smith uses.

In one embodiment, Voice Message Analyzer **710** answers the query “Who has sent a voice message to telephone extension number 3325?” Voice Message Analyzer **710** selects from Datastore **750** all Voice Message Record with Voice Message Recipient Identity that matches telephone extension number “3325”, and that includes a Voice Message Action Record with Voice Message Action of Action Send. Voice Message Analyzer **710** extracts from the selected zero or more Voice Message Record the Voice Message Sender Identity as the result of the analysis.

In another embodiment, Voice Message Analyzer **710** retrieves a “list of voice messages being sent during the half

hour before 3 p.m., Jun. 29, 2005, the closing time for the New York Stock Exchange.” Voice Message Analyzer **710** selects from Datastore **750** all Voice Message Record that includes a Voice Message Action Record with Voice Message Action Time between 2:30 p.m., and 3 p.m., on Jun. 29, 2005, and with Voice Message Action of Action Send. Voice Message Analyzer **710** retrieves from the selected zero or more Voice Message Record the Voice Message as the result of the analysis.

In one embodiment, Voice Message Analyzer **710** answers the query “Did Maria Anderson listen to a voice message from telephone number “408-234-5678” on Jul. 10, 2001?” Voice Message Analyzer **710** selects from Datastore **750** all Voice Message Record that includes Voice Message Recipient Identity matching the name “Maria Anderson” and Voice Message Sender Identity matching the telephone number “408-234-5678”, and that includes a Voice Message Action Record with Voice Message Action of Action Listen, and with Voice Message Action Time matching Jul. 10, 2001. If one or more Voice Message Record is selected, Voice Message Analyzer **710** indicates a “yes” as the result of the analysis. If no Voice Message Record is selected, Voice Message Analyzer **710** indicates a “no” as the result of the analysis.

In yet another embodiment, Voice Message Analyzer **710** retrieves a “list of senders who had mentioned the word “Enron” and “short sell” in a voice message he or she sent on Aug. 17, 2003?” Voice Message Analyzer **710** selects from Datastore **750** all Voice Message Record that includes Voice Message containing the audio patterns of “Enron” and “short sell”, and that includes a Voice Message Action Record with Voice Message Action of Action Send, and with Voice Message Action Time matching “Aug. 17, 2003”. Voice System retrieves from the selected zero or more Voice Message Record the Voice Message Sender Identity as the result of the analysis.

In one other embodiment, Voice Message Analyzer **710** answers the query “Among those who has listened to a voice message from John Smith on May 20, 2005, who has sent a voice message to the telephone number 408-222-3333 on May 20, 2005 or May 21, 2005?” Voice Message Analyzer **1010** selected from Datastore **750** a first group of Voice Message Record that includes Voice Message Sender Identity matching the name “John Smith” and that includes a Voice Message Action Record with Voice Message Action of Action Listen and with Voice Message Action Time matching “May 20, 2005”. Voice Message Analyzer **710** extracts the Voice Message Recipient Identity from the first group of Voice Message Record. Voice Message Analyzer **710** selects from Datastore **750** a second group of Voice Message Record that includes Voice Message Recipient Identity matching the telephone number “408-222-3333”, and that includes Voice Message Sender Identity matching one of the extracted Voice Message Recipient Identity, and that includes a Voice Message Action Record with Voice Message Action of Action Send and with Voice Message Action Time matching “May 20, 2005” or “May 21, 2005”. Voice Message Analyzer **710** retrieves from the second group of Voice Message Record the Voice Message Sender Identity as the result of the analysis.

In one embodiment, Voice Message Analyzer **710** retrieves a “list of all voice messages of Dave Leach’s family, where Dave’s family’s phone numbers are 408-123-3456, 650-233-4455, and 650-233-6890”. Voice Message Analyzer **710** selects from Datastore **750** a first group of Voice Message Record with Voice Message Recipient Identity that matches “Dave Leach”, and with Voice Message Sender Identity that matches one of Dave’s family’s phone numbers, and that includes a Voice Message Action Record with Voice Message

Action of Action Receive. Voice Message Analyzer **710** further selects from Datastore **750** a second group of Voice Message Record with Voice Message Sender Identity that matches "Dave Leach", and with Voice Message Recipient Identity that matches one of Dave's family's phone numbers, and that includes a Voice Message Action Record with Voice Message Action of Action Send. Voice Message Analyzer **710** retrieves from the first group and the second group of Voice Message Record the Voice Message as the result of the analysis.

In one embodiment, Voice Message Analyzer **710** retrieves "list of all voice messages that match a pattern of being sent to competitors within 24 hours of a board meeting." Voice Message Analyzer **710** selects from Datastore **750** a group of Voice Message Records with Voice Message Recipient Identity that matches a list of competitors, with Voice Message Action Time within 24 hours of a date and time of a board meeting, and that includes a Voice Message Action of Action Sent. The Voice Message Analyzer **710** retrieves from this group of Voice Message Records the Voice Message Sender Identity.

The analysis illustrated in FIG. 7 represents examples regarding usage information. It will be evident to skilled in the art to formulate similar analysis in order to provide other results regarding usage information.

FIG. 8 illustrates a process of reporting on a plurality of Voice Message Records.

Voice Message System includes a Voice Message Reporter **830**. In one embodiment, Voice Message Reporter **830** instructs Voice Message Analyzer **810** to conduct an analysis. In one embodiment, Voice Message Reporter **830** instructs the Voice Message Analyzer **850** based on a Report Specification.

In one embodiment, a Report Specification is based on corporate usage policies. In another embodiment, a Report Specification is based on governmental usage regulations. In another embodiment, a Report Specification is based on public service usage policies.

In one embodiment, a Report Specification includes an analysis to be conducted in order to generate a report. In another embodiment, a Report Specification includes a format of a report. In yet another embodiment, a Report Specification includes a method to publish a report. In one other embodiment, a Report Specification includes timing information. In one embodiment, the timing information includes a scheduled time to generate a report, such as 5 pm on Jul. 26, 2005, daily at 6 am, or every hour during business days. In one embodiment, Voice Message Reporter **830** includes a clock. In one embodiment, Voice Message Reporter **830** instructs Voice Message Analyzer **810** to conduct an analysis included in a Report Specification when the time of day indicated by the clock matches the timing information in the Report Specification.

In one embodiment, Voice Message Reporter **830** connects to a Report Specification Datastore **890**. Report Specification **890** stores a plurality of Report Specification. In one embodiment, Voice Message Reporter **830** retrieves a Report Specification from Report Specification Datastore **890**. In one embodiment, Voice Message Reporter **830** instructs Voice Message Analyzer **810** to conduct the analysis included in the retrieved Report Specification. In one embodiment, Voice Message Reporter **830** receives the result of the analysis to generate a report. In one embodiment, Voice Message Reporter **830** generates the report based on the format and publishing method included in the Report Specification.

In another embodiment, an operator submits a Report Specification to Voice Message Reporter **830**. In one embodi-

ment, Voice Message Reporter **830** instructs Voice Message Analyzer **810** to conduct the analysis included in the submitted Report Specification.

Foregoing described embodiments of the invention are provided as illustrations and descriptions. They are not intended to limit the invention to precise form described. In particular, it is contemplated that functional implementation of invention described herein may be implemented equivalently in hardware, software, firmware, and/or other available functional components or building blocks, and that networks may be wired, wireless, or a combination of wired and wireless. Other variations and embodiments are possible in light of above teachings, and it is thus intended that the scope of invention not be limited by this Detailed Description, but rather by Claims following.

What is claimed is:

1. A method for recording voice message usage information, comprising:

(a) creating and storing by the voice message system a first voice message record corresponding to a voice message from a voice message sender, wherein the first voice message record comprises: at least a first voice message action record recording a send action for the voice message; and a sending time comprising a time when the voice message sender sends the voice message;

(b) creating and storing by the voice message system a second voice message record corresponding to the voice message, the second voice message record comprising: at least a second voice message action record recording a receive action for the voice message; and a receiving time comprising a time when the receive action occurs;

(c) receiving a time by the voice message system;

(d) in response to determining that the time matches the sending time, retrieving the first voice message record; and

(e) in response to determining that the time matches the receiving time, retrieving the second voice message record.

2. The method of claim 1, wherein the time received by the voice message system comprises a range, wherein the retrieving (d) and the retrieving (e) comprises:

(d1) in response to determining that the sending time is within the range, retrieving the first voice message record; and

(e1) in response to determining that the receiving time is within the range, retrieving the second voice message record.

3. A method for recording voice message usage information, comprising:

(a) creating and storing by the voice message system a first voice message record corresponding to a voice message from a voice message sender, wherein the first voice message record comprises: at least a first voice message action record recording a send action for the voice message; and a sending time comprising a time when the voice message sender sends the voice message;

(b) creating and storing by the voice message system a second voice message record corresponding to the voice message, the second voice message record comprising: at least a second voice message action record recording a receive action for the voice message; and a receiving time comprising a time when the receive action occurs;

(c) receiving an action by the voice message system;

(d) in response to determining that the action matches the send action, retrieving the first voice message record; and

11

- (e) in response to determining that the action matches the receive action, retrieving the second voice message record.
4. A method for recording voice message usage information, comprising:
- creating and storing by the voice message system a first voice message record corresponding to a voice message from a voice message sender, wherein the first voice message record comprises: at least a first voice message action record recording a send action for the voice message; a sending time comprising a time when the voice message sender sends the voice message; and a sender identity;
  - creating and storing by the voice message system a second voice message record corresponding to the voice message, the second voice message record comprising: at least a second voice message action record recording a receive action for the voice message; a receiving time comprising a time when the receive action occurs; a recipient identity;
  - receiving an identity by the voice message system;
  - in response to determining that the identity matches the sender identity, retrieving the first voice message record; and
  - in response to determining that the identity matches the recipient identity, retrieving the second voice message record.
5. A method for recording voice message usage information, comprising:
- creating and storing by the voice message system a first voice message record corresponding to a voice message from a voice message sender, wherein the first voice message record comprises: at least a first voice message action record recording a send action for the voice message; and a sending time comprising a time when the voice message sender sends the voice message; and
  - creating and storing by the voice message system a second voice message record corresponding to the voice message, the second voice message record comprising: at least a second voice message action record recording a receive action for the voice message; a receiving time comprising a time when the receive action occurs; and a location of a voice message recipient during the receive action.
6. A method for recording voice message usage information, comprising:
- creating and storing by the voice message system a first voice message record corresponding to a voice message from a voice message sender, wherein the first voice message record comprises: at least a first voice message action record recording a send action for the voice message; and a sending time comprising a time when the voice message sender sends the voice message;
  - creating and storing by the voice message system a second voice message record corresponding to the voice message, the second voice message record comprising: at least a second voice message action record recording a receive action for the voice message; and a receiving time comprising a time when the receive action occurs;
  - receiving a word by the voice message system; and
  - in response to determining that the voice message comprises an audio pattern matching the word, retrieving the first voice message record and the second voice message record.
7. A method for recording voice message usage information, comprising:

12

- creating and storing by the voice message system a first voice message record corresponding to a voice message from a voice message sender, wherein the first voice message record comprises: at least a first voice message action record recording a send action for the voice message; and a sending time comprising a time when the voice message sender sends the voice message;
  - creating and storing by the voice message system a second voice message record corresponding to the voice message, the second voice message record comprising: at least a second voice message action record recording a receive action for the voice message; and a receiving time comprising a time when the receive action occurs;
  - receiving a pattern by the voice message system, wherein the pattern comprises two or more of the following: an identity; a time; and an action;
  - in response to determining that the first voice message action record matches the pattern, retrieving the first voice message action record, wherein the first voice message action record matching the pattern comprises two or more of the following:
    - a sender identity in the first voice message action record matches the identity;
    - the time in the first voice message action record matches the time received by the voice message system; and
    - the action matches the send action; and
  - in response to determining that the second voice message action record matches the pattern, retrieving the second voice message action record, wherein the second voice message action record matching the pattern comprises two or more of the following:
    - a recipient identity in the second voice message action record matches the identity;
    - the time in the second voice message action record matches the time received by the voice message system; and
    - the action matches the receive action.
8. A system, comprising:
- a datastore storing a plurality of voice message records; and
- a voice message system, wherein the voice message system:
- creates and stores in the datastore a first voice message record corresponding to a voice message from a voice message sender, wherein the first voice message record comprises: at least a first voice message action record recording a send action for the voice message; and a sending time comprising a time when the voice message sender sends the voice message;
  - creates and stores in the datastore a second voice message record corresponding to the voice message, the second voice message record comprising: at least a second voice message action record recording a receive action for the voice message; and a receiving time comprising a time when the receive action occurs;
  - receives a time;
  - in response to determining that the time matches the sending time, retrieves the first voice message record from the datastore; and
  - in response to determining that the time matches the receiving time, retrieves the second voice message record from the datastore.
9. The system of claim 8, wherein the time received by the voice message system comprises a range, wherein the retrieves (d) and the retrieves (e) comprises:

13

- (d1) in response to determining that the sending time is within the range, retrieves the first voice message record from the datastore; and
- (e1) in response to determining that the receiving time is within the range, retrieves the second voice message record from the datastore. 5
- 10. A system, comprising:
  - a datastore storing a plurality of voice message records; and
  - a voice message system, wherein the voice message system: 10
    - (a) creates and stores in the datastore a first voice message record corresponding to a voice message from a voice message sender, wherein the first voice message record comprises: at least a first voice message action record recording a send action for the voice message; and a sending time comprising a time when the voice message sender sends the voice message; 15
    - (b) creates and stores in the datastore a second voice message record corresponding to the voice message, the second voice message record comprising: at least a second voice message action record recording a receive action for the voice message; and a receiving time comprising a time when the receive action occurs; 20
    - (c) receives an action; 25
    - (d) in response to determining that the action matches the send action, retrieves the first voice message record from the datastore; and
    - (e) in response to determining that the action matches the receive action, retrieves the second voice message record from the datastore. 30
- 11. A system, comprising:
  - a datastore storing a plurality of voice message records; and 35
  - a voice message system, wherein the voice message system:
    - (a) creates and stores in the datastore a first voice message record corresponding to a voice message from a voice message sender, wherein the first voice message record comprises: at least a first voice message action record recording a send action for the voice message; a sending time comprising a time when the voice message sender sends the voice message; and a sender identity; 40
    - (b) creates and stores in the datastore a second voice message record corresponding to the voice message, the second voice message record comprising: at least a second voice message action record recording a receive action for the voice message; a receiving time comprising a time when the receive action occurs; and a recipient identity; 45
    - (c) receives an identity;
    - (d) in response to determining that the identity matches the sender identity, retrieves the first voice message record from the datastore; and 55
    - (e) in response to determining that the identity matches the recipient identity, retrieves the second voice message record from the datastore.
- 12. A system, comprising: 60
  - a datastore storing a plurality of voice message records; and
  - a voice message system, wherein the voice message system:
    - (a) creates and stores in the datastore a first voice message record corresponding to a voice message from a voice message sender, wherein the first voice message 65

14

- record comprises: at least a first voice message action record recording a send action for the voice message; and a sending time comprising a time when the voice message sender sends the voice message; and
- (b) creates and stores in the datastore a second voice message record corresponding to the voice message, the second voice message record comprising: at least a second voice message action record recording a receive action for the voice message; a receiving time comprising a time when the receive action occurs; and a location of a voice message recipient during the receive action.
- 13. A system, comprising:
  - a datastore storing a plurality of voice message records; and
  - a voice message system, wherein the voice message system:
    - (a) creates and stores in the datastore a first voice message record corresponding to a voice message from a voice message sender, wherein the first voice message record comprises: at least a first voice message action record recording a send action for the voice message; and a sending time comprising a time when the voice message sender sends the voice message; 70
    - (b) creates and stores in the datastore a second voice message record corresponding to the voice message, the second voice message record comprising: at least a second voice message action record recording a receive action for the voice message; and a receiving time comprising a time when the receive action occurs; 75
    - (c) receives a word; and
    - (d) in response to determining that the voice message comprises an audio pattern matching the word, retrieves the first voice message record and the second voice message record.
- 14. A system, comprising:
  - a datastore storing a plurality of voice message records; and
  - a voice message system, wherein the voice message system:
    - (a) creates and stores in the datastore a first voice message record corresponding to a voice message from a voice message sender, wherein the first voice message record comprises: at least a first voice message action record recording a send action for the voice message; and a sending time comprising a time when the voice message sender sends the voice message; 80
    - (b) creates and stores in the datastore a second voice message record corresponding to the voice message, the second voice message record comprising: at least a second voice message action record recording a receive action for the voice message; and a receiving time comprising a time when the receive action occurs; 85
    - (c) receives a pattern, wherein the pattern comprises two or more of the following: an identity; a time; and an action;
    - (d) in response to determining that the first voice message action record matches the pattern, retrieves the first voice message action record, wherein the first voice message action record matching the pattern comprises two or more of the following:
      - a sender identity in the first voice message action record matches the identity;
      - the time in the first voice message action record matches the time received by the voice message system; and



15

the action matches the send action; and  
 (e) in response to determining that the second voice message action record matches the pattern, retrieves the second voice message action record, wherein the second voice message action record matching the pattern comprises two or more of the following:  
 a recipient identity in the second voice message action record matches the identity;  
 the time in the second voice message action record matches the time received by the voice message system; and  
 the action matches the receive action.

15. A non-transitory computer readable medium comprising computer readable program instructions for recording voice message usage information, wherein the computer readable program instructions when executed by a computer causes the computer to:

- (a) create and store in a datastore a first voice message record corresponding to a voice message from a voice message sender, wherein the first voice message record comprises: at least a first voice message action record recording a send action for the voice message; and a sending time comprising a time when the voice message sender sends the voice message;
- (b) create and store in the datastore a second voice message record corresponding to the voice message, the second voice message record comprising: at least a second voice message action record recording a receive action for the voice message; and a receiving time comprising a time when the receive action occurs;
- (c) receive a time;
- (d) in response to determining that the time matches the sending time, retrieve the first voice message record from the datastore; and
- (e) in response to determining that the time matches the receiving time, retrieve the second voice message record from the datastore.

16. The medium of claim 15, wherein the time received comprises a range, wherein the retrieve (d) and the retrieve (e) comprises:

- (d1) in response to determining that the sending time is within the range, retrieve the first voice message record from the datastore; and
- (e1) in response to determining that the receiving time is within the range, retrieve the second voice message record from the datastore.

17. A non-transitory computer readable medium comprising computer readable program instructions for recording voice message usage information, wherein the computer readable program instructions when executed by a computer causes the computer to:

- (a) create and store in a datastore a first voice message record corresponding to a voice message from a voice message sender, wherein the first voice message record comprises: at least a first voice message action record recording a send action for the voice message; and a sending time comprising a time when the voice message sender sends the voice message;
- (b) create and store in the datastore a second voice message record corresponding to the voice message, the second voice message record comprising: at least a second voice message action record recording a receive action for the voice message; and a receiving time comprising a time when the receive action occurs;
- (c) receive an action;

16

- (d) in response to determining that the action matches the send action, retrieve the first voice message record from the datastore; and
- (e) in response to determining that the action matches the receive action, retrieve the second voice message record from the datastore.

18. A non-transitory computer readable medium comprising computer readable program instructions for recording voice message usage information, wherein the computer readable program instructions when executed by a computer causes the computer to:

- (a) create and store in a datastore a first voice message record corresponding to a voice message from a voice message sender, wherein the first voice message record comprises: at least a first voice message action record recording a send action for the voice message; a sending time comprising a time when the voice message sender sends the voice message; and a sender identity;
- (b) create and store in the datastore a second voice message record corresponding to the voice message, the second voice message record comprising: at least a second voice message action record recording a receive action for the voice message; a receiving time comprising a time when the receive action occurs; and a recipient identity;
- (c) receive an identity;
- (d) in response to determining that the identity matches the sender identity, retrieve the first voice message record from the datastore; and
- (e) in response to determining that the identity matches the recipient identity, retrieve the second voice message record from the datastore.

19. A non-transitory computer readable medium comprising computer readable program instructions for recording voice message usage information, wherein the computer readable program instructions when executed by a computer causes the computer to:

- (a) create and store in a datastore a first voice message record corresponding to a voice message from a voice message sender, wherein the first voice message record comprises: at least a first voice message action record recording a send action for the voice message; and a sending time comprising a time when the voice message sender sends the voice message; and
- (b) create and store in the datastore a second voice message record corresponding to the voice message, the second voice message record comprising: at least a second voice message action record recording a receive action for the voice message; a receiving time comprising a time when the receive action occurs; and a location of a voice message recipient during the receive action.

20. A non-transitory computer readable medium comprising computer readable program instructions for recording voice message usage information, wherein the computer readable program instructions when executed by a computer causes the computer to:

- (a) create and store in a datastore a first voice message record corresponding to a voice message from a voice message sender, wherein the first voice message record comprises: at least a first voice message action record recording a send action for the voice message; a sending time comprising a time when the voice message sender sends the voice message; and a location of a voice message sender during the send action;
- (b) create and store in the datastore a second voice message record corresponding to the voice message, the second voice message record comprising: at least a second voice message action record recording a receive action for the

17

voice message; and a receiving time comprising a time when the receive action occurs;

(c) receive a word; and

(d) in response to determining that the voice message comprises an audio pattern matching the word, retrieve the first voice message record and the second voice message record.

21. A non-transitory computer readable medium comprising computer readable program instructions for recording voice message usage information, wherein the computer readable program instructions when executed by a computer causes the computer to:

(a) create and store in a datastore a first voice message record corresponding to a voice message from a voice message sender, wherein the first voice message record comprises: at least a first voice message action record recording a send action for the voice message; a sending time comprising a time when the voice message sender sends the voice message; and a location of a voice message sender during the send action;

(b) create and store in the datastore a second voice message record corresponding to the voice message, the second voice message record comprising: at least a second voice message action record recording a receive action for the voice message; and a receiving time comprising a time when the receive action occurs;

18

(c) receive a pattern, wherein the pattern comprises two or more of the following: an identity; a time; and an action;

(d) in response to determining that the first voice message action record matches the pattern, retrieve the first voice message action record, wherein the first voice message action record matching the pattern comprises two or more of the following:

a sender identity in the first voice message action record matches the identity;

the time in the first voice message action record matches the time received by the voice message system; and the action matches the send action; and

(e) in response to determining that the second voice message action record matches the pattern, retrieve the second voice message action record, wherein the second voice message action record matching the pattern comprises two or more of the following:

a recipient identity in the second voice message action record matches the identity;

the time in the second voice message action record matches the time received by the voice message system; and

the action matches the receive action.

\* \* \* \* \*